Modular Soldering Irons

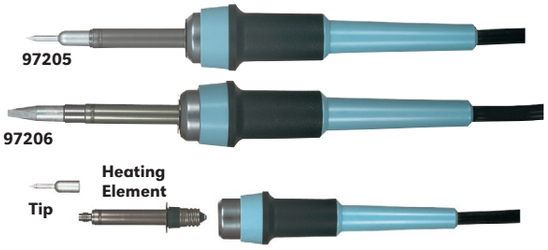

- Ready-to-use, professional soldering irons
- Heating elements and iron-clad, plated copper tips are easily replaced
- Handles are three-wire grounded with soft-touch acid- and flux-resistant grips
- Six-foot cord
- UL listed

Description	Watts	Temperature	Lawson No.	Pkg. Qty.
Pencil-Point Tip	23	700°F (371°C)	**97205**	1
Chisel Tip	45	900°F (482°C)	**97206**	1

Replacement Tips

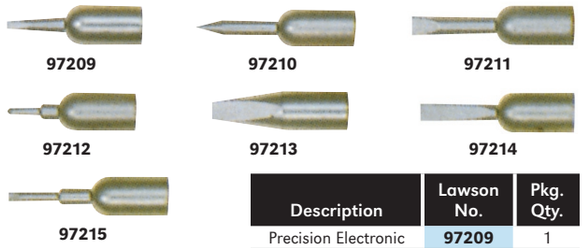

Description	Lawson No.	Pkg. Qty.
Precision Electronic	**97209**	1
Pencil	**97210**	1
Chisel	**97211**	1
Micro-Spade	**97212**	1
Long Taper Chisel	**97213**	1
Screwdriver	**97214**	1
Stepped Chisel	**97215**	1

Replacement Heating Elements

- For 1/4" thread-on tips
- 3.43" long, 0.364" dia.

Watts	Temperature	Lawson No.	Pkg. Qty.
23	700°F (371°C)	**97207**	1
45	900°F (482°C)	**97208**	1

Soldering Iron Holder

- Stay-cool ceramic mouthpiece
- Non-skid tray design
- Replaceable tip-cleaning sponge

Description	Lawson No.	Pkg. Qty.
Soldering Iron Holder	**97216**	1
Replacement Sponge	**97217**	1

Solder Sack



- Ready-to-use assortment for electrical and electronic applications
- Pouch keeps work bench organized; card holder allows personal labeling of sack
- Solder Sack includes one each of the following: Soldering Iron No. 97205, two 1/16" x 5 ft. Desoldering Wick Spools No. 96986, 1/8" x 5 ft. Desoldering Wick Spool No. 96987, 1/32" x 14 ft. 60/40 Rosin Core Solder Spool No. 81556 and 12" x 8" Pouch No. 94884

Description	Lawson No.	Pkg. Qty.
Solder Sack	**97401**	1

Desoldering Wicks

5-Foot Spool

25-Foot Spool

- Superior absorbing wick for complete solder removal
- Simplifies removal and replacement of components
- Can be used for solder removal on plated-through and multilayer printed wiring board assemblies
- Tinned, braided copper for long shelf life
- Meets all military and government specifications, including MIL-F-14256C and NASA NPC 200-4, SP 5002 and NHB 5300-4 (3A)

Dia. (Inches)	Length (Ft.)	Lawson No.	Pkg. Qty.
1/16	5	**96986**	1 Spool
1/8	5	**96987**	1 Spool
1/32	25	**96988**	1 Spool
1/16	25	**96989**	1 Spool
1/8	25	**96990**	1 Spool